





FORENO.

ESPREE FLO Sink Mixer Chrome EF01

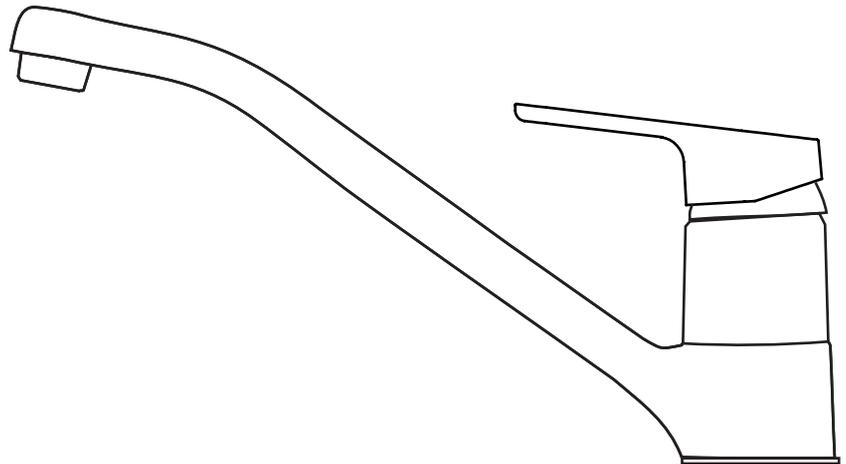

9 421027 593800

Congratulations on your purchase of this high quality product from Foreno Tapware.
Please read the following before installation and retain (along with your receipt) for future reference.

TECHNICAL SPECIFICATIONS

Suitable for All Pressures

Minimum Pressure = 35kPa

Maximum operating Pressure = 500kPa

Maximum operating Temperature = 65 deg. Celsius

For domestic use only.

CONFIGURATION

Mains Pressure systems Remove the valve insert from the valve nipple and change aerator to the WELS rated one (supplied).

Unequal Low systems Ensure the nipple valve is attached to the cold in-feed hose (with the flow arrow aligned to the water flow).

Equal Low systems Remove the valve insert from the valve nipple.

INSTALLATION

FOR PRESSURES EXCEEDING 500KPA INSTALL A PRESSURE REDUCING VALVE. THOROUGHLY FLUSH ALL PIPES TO ELIMINATE ANY REMAINING DIRT AND RESIDUE AND INSTALL INLINE FILTERS. FAILURE TO DO SO MAY VOID THE WARRANTY.

- Position tap in 35mm hole, making sure the seal between tap and supporting surface is in place.
- Connect supply hoses to plumbing connections.
Note: When fitting the Hot supply flexi-hose (bigger bore hose with pipe extension) please ensure that the O ring on the spigot end beds into the body recess (ie. the shoulder face of the tube extension tightens to the base face).
- Anchor to bench with fittings pack.
- Where applicable, it is important to ensure the base ring is hand-tight on the mixer, prior to installation.
- Connect supply hoses to plumbing connections. **Maximum bend for flexible hose is 35mm radius. Do not stretch, crush or twist hoses. Do not swage hose ends.**

ATTACH PROOF OF PURCHASE HERE

- Turn on mains supply.
- Check for leaks.

Plumbers Note: Do not pressure test this mixer under static pressure.

TROUBLESHOOTING

Hot flow is over-riding hot pressure:

Regulator nipple has not been attached to the cold supply hose.

Flow is slower than 5 litres per minute on the hot supply side:

Aerator is partially blocked, remove aerator - clean and replace.

Mixer does not shut off:

Cartridge nut needs tightening or the cartridge has been damaged by dirty water.

WARRANTY

Please refer to our website for warranty information: www.foreno.co.nz/warranty

In the unlikely event that this product fails during its warranty period, phone our Customer Service team immediately on 0508 FORENO (0508 367 366) – as unauthorised removal of the product may void the warranty.

CARE AND MAINTENANCE

NOT TO BE CLEANED WITH ASTRINGENT, ABRASIVE OR CITRIC CLEANERS.

We recommend using only a soft, damp cloth and on occasion a mild soap solution. Try to avoid excessive scrubbing as this could cause damage and void your warranty.

PROUD PARTNER AND SUPPORTER OF MASTER PLUMBERS, GASFITTERS AND DRAINLAYERS

