




FORENO.

FORENO Basin Taps H-T Ceramic Chrome FBT1HT



9 421009 510092

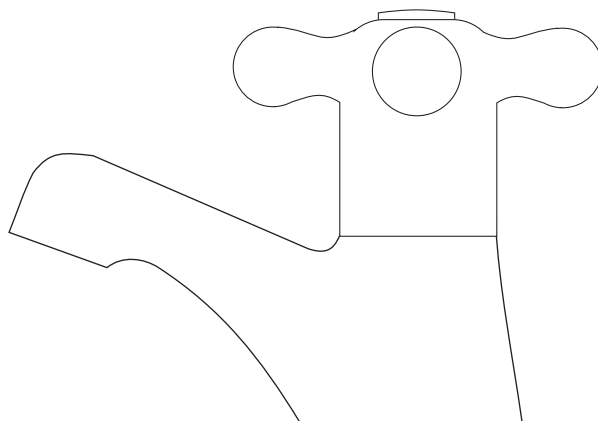

Congratulations on your purchase of this high quality product from Foreno Tapware.
Please read the following before installation and retain (along with your receipt) for future reference.

TECHNICAL SPECIFICATIONS

Suitable for All Pressures

Minimum Pressure = 17kPa

Maximum operating Pressure = 500kPa

Maximum operating Temperature = 65 deg. Celsius

For domestic use only.

CONFIGURATION

Mains Pressure systems Insert the valve from the
mains pressure pack.
See diagram.


Unequal Low Systems Install as supplied.

Equal Low systems Install as supplied.

INSTALLATION

**FOR PRESSURES EXCEEDING 500KPA INSTALL A PRESSURE
REDUCING VALVE. THOROUGHLY FLUSH ALL PIPES TO
ELIMINATE ANY REMAINING DIRT AND RESIDUE AND INSTALL
INLINE FILTERS. FAILURE TO DO SO MAY VOID THE WARRANTY.**

- Drill a minimum 25mm hole within the vanity top.
- Remove back-nut and basin spacer.
- Mount tap with o-ring in base groove.
- Fit basin spacer underneath and tighten on back-nut.
- Connect to plumbing.
- Turn on water supply. Check for leaks.

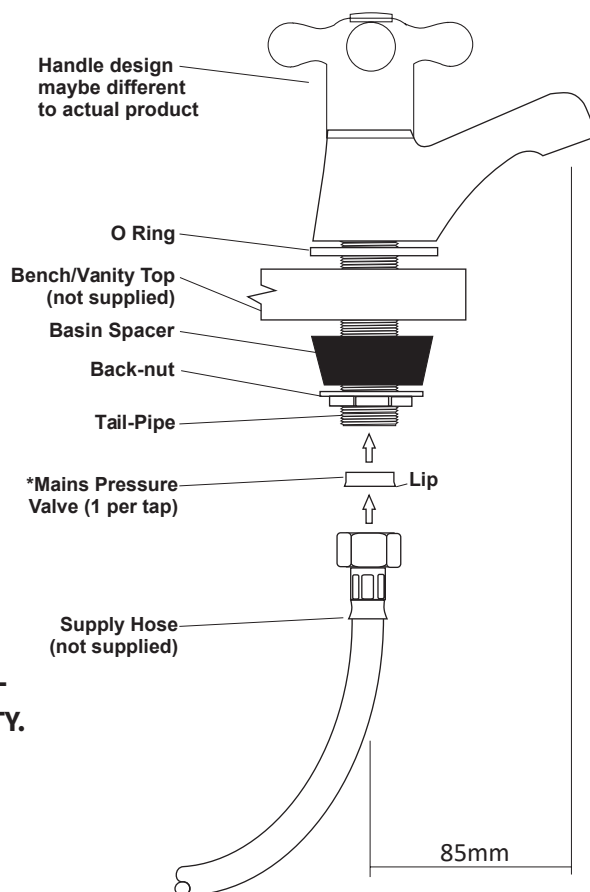

ATTACH PROOF OF PURCHASE HERE

WARRANTY

Please refer to our website for warranty information: www.foreno.co.nz/warranty

In the unlikely event that this product fails during its warranty period, phone our Customer Service team immediately on 0508 FORENO (0508 367 366) – as unauthorised removal of the product may void the warranty.

CARE AND MAINTENANCE

SHOULD NOT BE CLEANED WITH ASTRINGENT, ABRASIVE OR CITRIC CLEANERS.

A soft, damp cloth is recommended for cleaning. Mild soap solutions can also be used on occasion.

PROUD PARTNER AND SUPPORTER OF MASTER PLUMBERS, GASFITTERS AND DRAINLAYERS

