





# FORENO.

## LE TAP Basin Faucet Chrome LT450



9 421009 512423

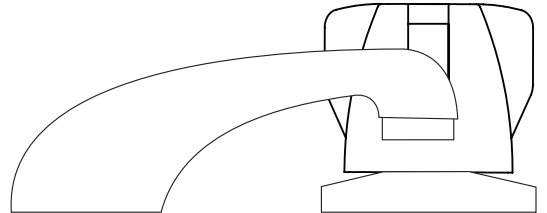

Congratulations on your purchase of this high quality product from Foreno Tapware.  
Please read the following before installation and retain (along with your receipt) for future reference.

### TECHNICAL SPECIFICATIONS

#### Suitable for All Pressures

Minimum Pressure = 17kPa

Maximum operating Pressure = 500kPa

Maximum operating Temperature = 65 deg. Celsius

For domestic use only.

### CONFIGURATION

Mains Pressure systems Install as supplied.

Unequal Low Systems Install as supplied.


Equal Low systems Install as supplied.

### INSTALLATION

**For pressures exceeding 500kPa install a pressure reducing valve. Failure to do so may void the warranty.**

- In order to remove handles, the chrome disc needs to be prized out and handle retaining screw undone.
- 30mm holes are required for each tap body and 24mm hole for the spout spigot. The vanity top thickness must not exceed 38mm. The tap bodies may be spaced at between 150mm & 210mm hole centres.
- Once the holes are drilled, wind the back-nuts (see diagram, item 7) back on the tap bodies to allow for a minimum 4 thread protrusion above the vanity top.
- Cut the breech pipe (item 10) to the correct size.
- Fit the centre spout, with flat washer (item 2) on the top, flanged back-nut (item 3) underneath. Tighten.
- Fit the breech pipe to the tap bodies and push the centre spigot into the spout tail and the tap bodies into the drilled holes.
- Place the mounting washers and flanges on the tap bodies. Tighten down.
- Tighten compression nut and olive (items 11 + 12) on either end of the breech pipe.

#### Key Components

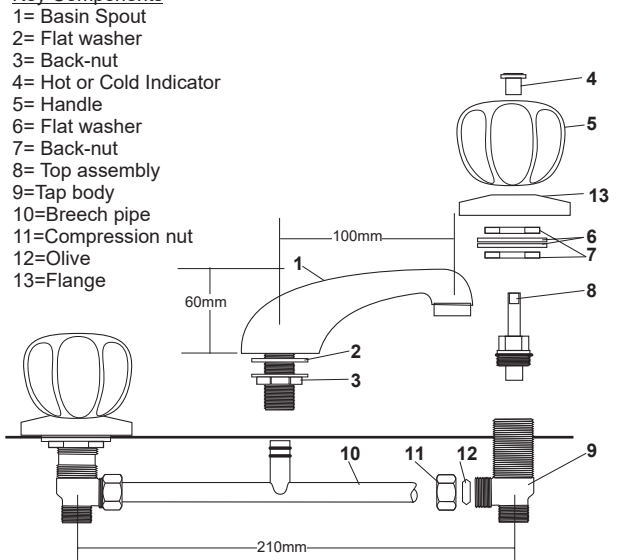

ATTACH PROOF OF PURCHASE HERE

- Place handles on and screw on Indicator nuts (item 4).
- Turn on water supply. Check for leaks.

#### WARRANTY

Please refer to our website for warranty information: [www.foreno.co.nz/warranty](http://www.foreno.co.nz/warranty)

In the unlikely event that this product fails during its warranty period, phone our Customer Service team immediately on 0508 FORENO (0508 367 366) – as unauthorised removal of the product may void the warranty.

#### CARE AND MAINTENANCE

**SHOULD NOT BE CLEANED WITH ASTRINGENT, ABRASIVE OR CITRIC CLEANERS.**

A soft, damp cloth is recommended for cleaning. Mild soap solutions can also be used on occasion.

PROUD PARTNER AND SUPPORTER OF MASTER PLUMBERS, GASFITTERS AND DRAINLAYERS



**Master Plumbers**  
Representing Excellence



**Master Gasfitters**  
Representing Excellence



**Master Drainlayers**  
Representing Excellence